United States Patent [19]

Allen et al.

[11] **Patent Number: 4,635,524**

[45] **Date of Patent: Jan. 13, 1987**

[54] **KETTLEDRUM**

[76] Inventors: **Barbara A. Allen; Rebecca Kite,** both of P.O. Box 1954, Bloomington, Ind. 47402

[21] Appl. No.: **617,747**

[22] Filed: **Jun. 6, 1984**

[51] **Int. Cl.**[4] **G10D 13/02**

[52] **U.S. Cl.** ..... **84/419;** 84/411 A

[58] **Field of Search** 84/411–422

[56] **References Cited**

U.S. PATENT DOCUMENTS

Re. 16,226	12/1925	Strupe .	
355,970	1/1887	Boulanger .	
355,971	1/1887	Boulanger .	
874,050	12/1907	Bower .	
1,282,406	10/1918	Gardner	84/419
1,356,193	10/1920	Danly .	
1,391,437	9/1921	Wiedoeft .	
1,391,786	9/1921	Nelson	84/411 R
1,469,197	9/1923	Strupe .	
1,561,789	11/1925	Ludwig et al. .	
1,561,790	11/1925	Ludwig et al. .	
1,565,329	12/1925	Robison .	
1,755,569	4/1930	Strupe .	
1,845,625	2/1932	Robison .	
1,916,123	6/1933	Greenleaf .	
2,070,082	2/1937	Horak .	
2,074,194	3/1937	Strupe .	
2,150,981	3/1939	Ludwig .	
2,205,593	6/1940	Jeffries .	
2,259,268	10/1941	Robison .	
2,261,119	11/1941	Ludwig et al. .	
2,276,846	3/1942	Jeffries .	
2,502,733	4/1950	Ludwig .	
2,568,504	9/1951	Ludwig .	
2,586,476	2/1952	Murbach .	
2,587,310	2/1952	Goodman .	
2,729,133	1/1956	Ludwig .	
3,021,743	2/1962	Ludwig .	
3,163,075	12/1964	Toperzer, Jr. .	
3,279,299	10/1966	Murbach .	
3,376,777	4/1968	Becker-Ehmck .	
3,608,418	9/1971	Chaffee et al. .	
3,646,843	3/1972	Kregal .	
3,701,834	10/1972	Rubio .	
3,747,463	7/1973	Hinger .	
4,056,998	11/1977	Rampton .	
4,188,852	2/1980	Light .	
4,278,003	7/1981	Hanson .	

FOREIGN PATENT DOCUMENTS

87629	3/1922	Austria .	
12816	4/1881	Fed. Rep. of Germany .	
15199	10/1881	Fed. Rep. of Germany .	
82118	7/1895	Fed. Rep. of Germany .	
407916	1/1925	Fed. Rep. of Germany .	
607449	12/1934	Fed. Rep. of Germany .	
1024321	2/1958	Fed. Rep. of Germany .	
2348604	10/1975	Fed. Rep. of Germany	84/419
923594	2/1947	France .	
458236	7/1950	Italy .	
2310	of 1856	United Kingdom .	
590803	7/1947	United Kingdom .	
2083265	3/1982	United Kingdom	84/422 R

Primary Examiner—Lawrence R. Franklin
Attorney, Agent, or Firm—Barnes & Thornburg

[57] **ABSTRACT**

A percussion instrument includes a drum body and a percussion head movable with respect to and stretched over the drum body. A master tensioning member is provided for pulling the drumhead downward to enable a musician to vary the pitch of the sound produced when the drumhead is struck. The master tensioning member is operatively coupled to the drumhead, and is adaptable for use with drumheads of varying size. A lever system is provided for moving the master tensioning member vertically downwardly. A foot pedal is provided for enabling the user to actuate the lever system. The pedal includes an engaging tooth, and is swivelable to engage and disengage the tooth with complementary teeth to lock the pedal selectively in position. The pedal tooth thereby permits the user to adjust and fix the tension on the drumhead. The pedal is connected to the lever system by a movable fulcrum, which permits the user to exert a smooth, even force when depressing the pedal and actuating the lever system.

20 Claims, 8 Drawing Figures

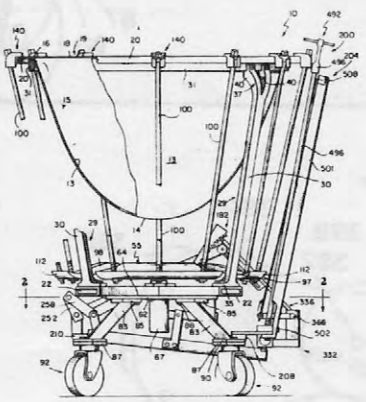

FIG. 1

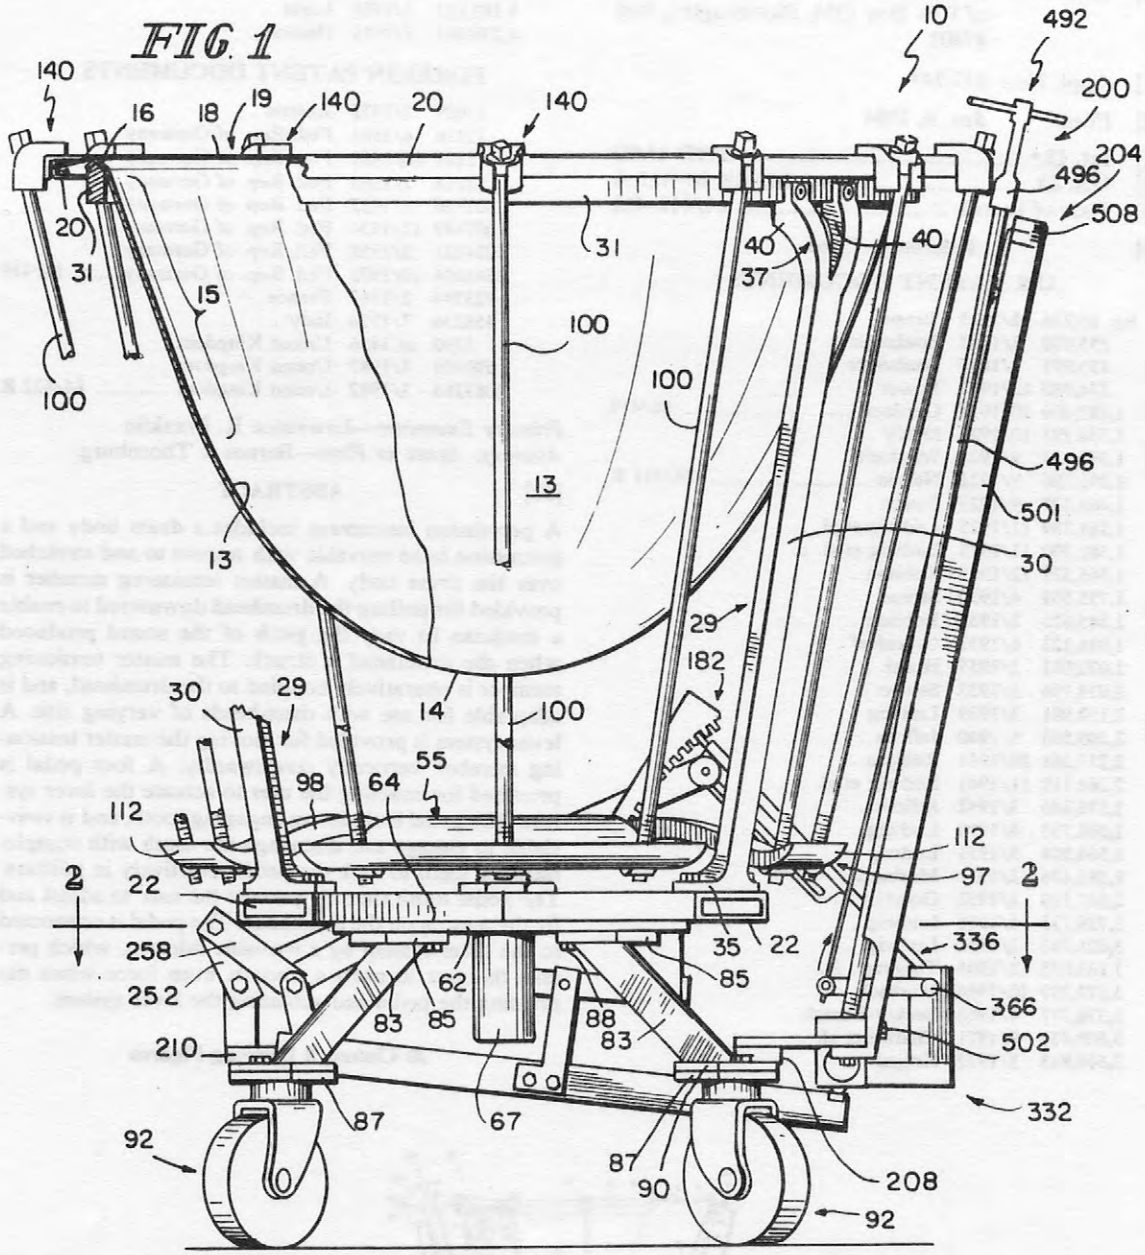

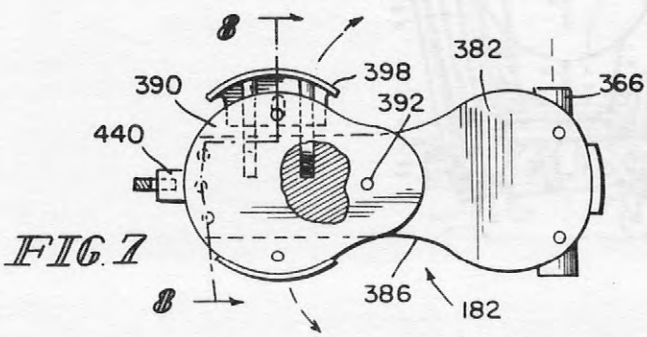

FIG. 7

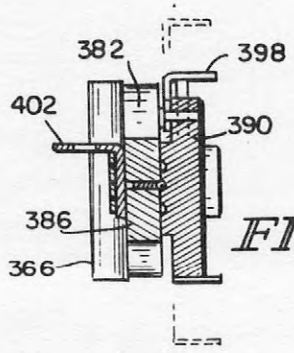

FIG. 8

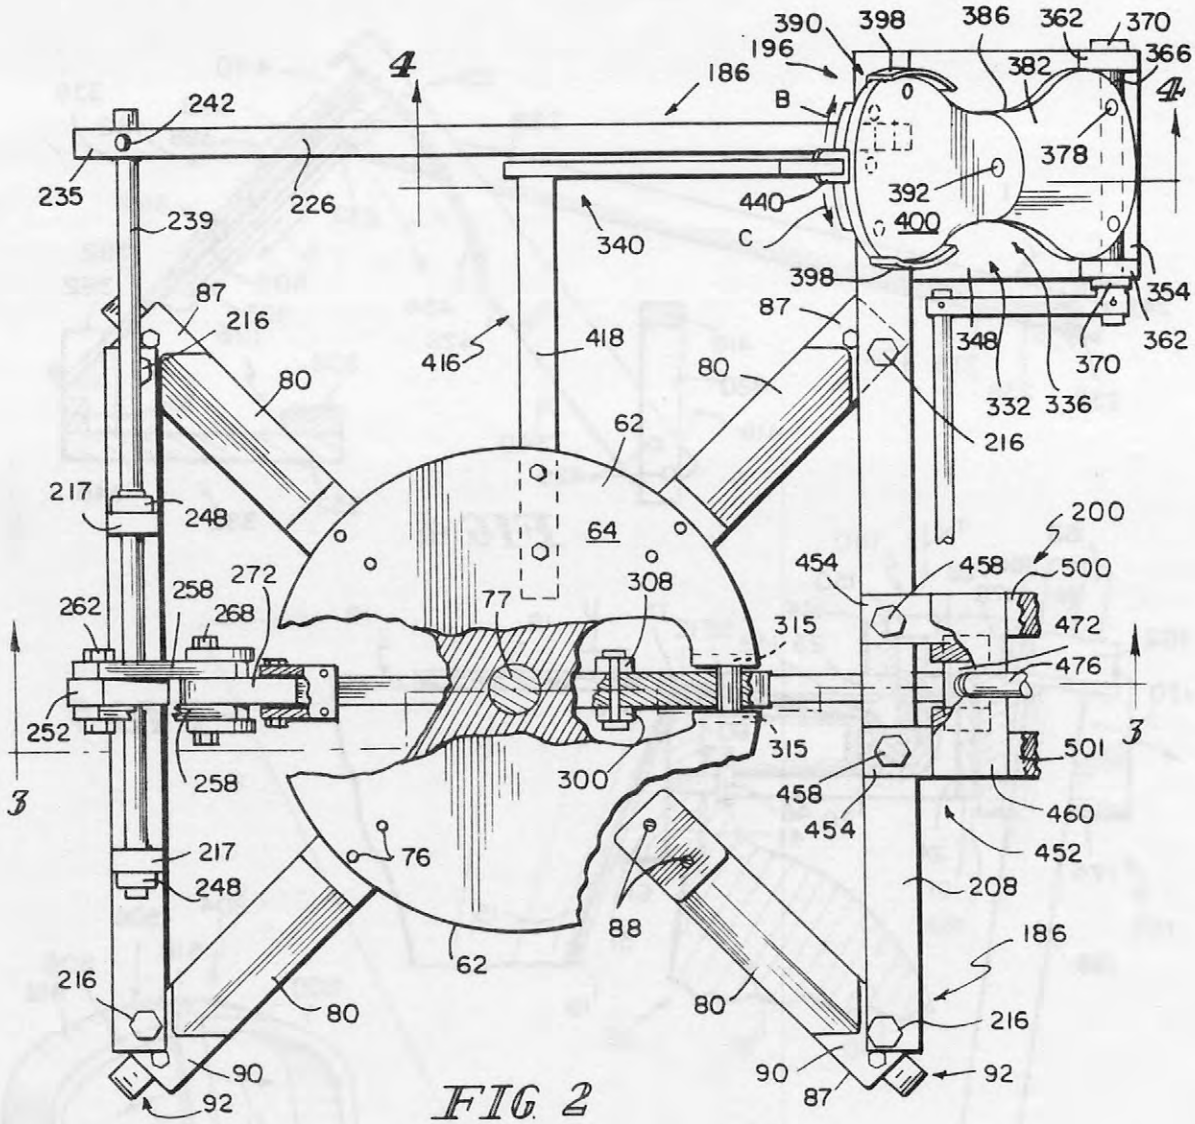
390
398
386
362
370
196
186
382
366
4
242
B
378
235
226
239
340
440
392
400
C
398
354
87
216
348
370
362
416
418
80
332
336
62
216
217
248
64
200
454
458
500
262
258
272
268
77
308
315
472
476
252
258
300
315
501
3
458
454
460
452
217
248
76
208
88
62
186
216
80
80
216
90
92
90
87
92

FIG. 2

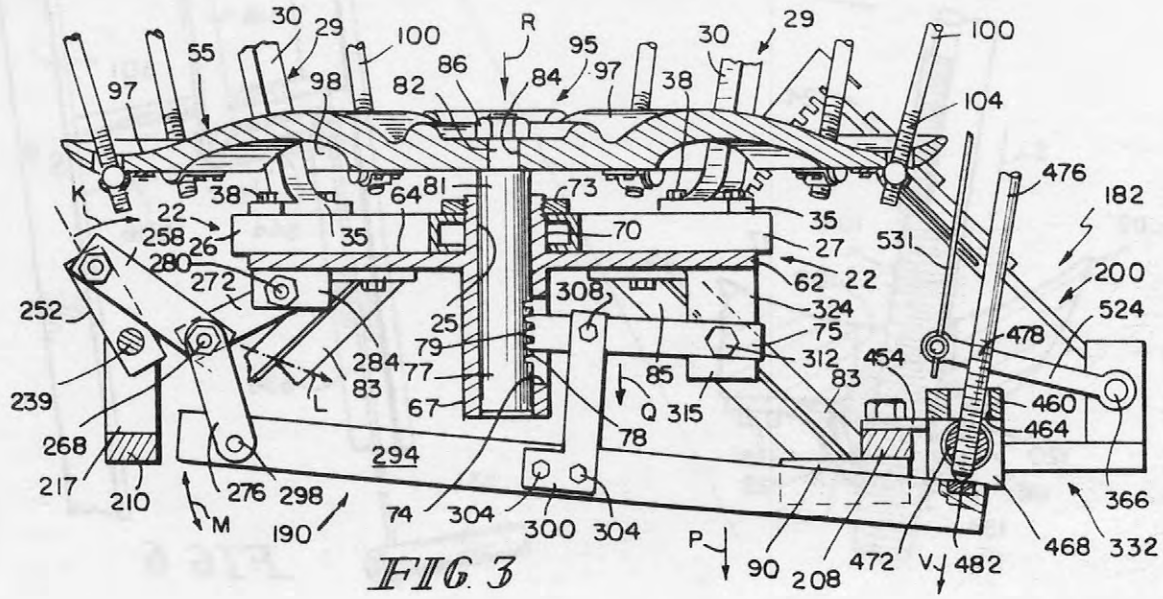
30
29
100
R
95
55
98
82
86
84
97
38
30
29
100
97
104
K
38
64
81
73
35
476
182
22
258
26
35
70
27
531
280
272
62
22
200
252
308
324
524
25
79
75
478
284
77
312
454
239
83
L
67
85
Q
315
83
460
78
464
268
294
217
210
276
298
M
190
74
304
300
304
P
366
90
208
472
V
482
468
332

FIG. 3

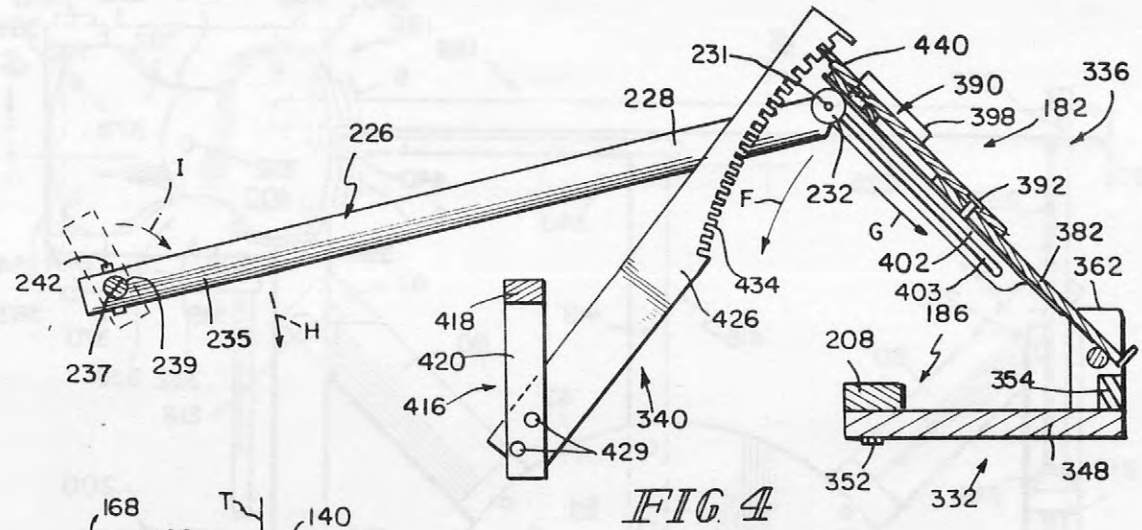

FIG. 4

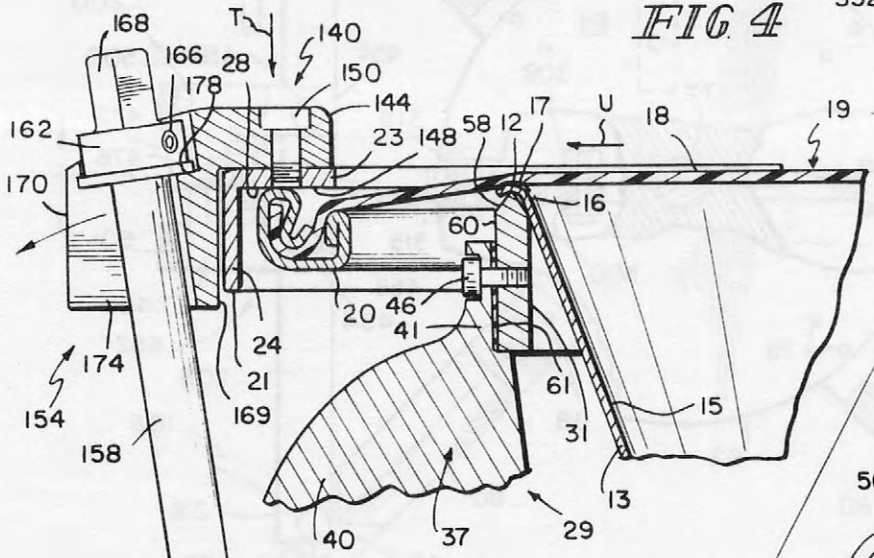

FIG. 5

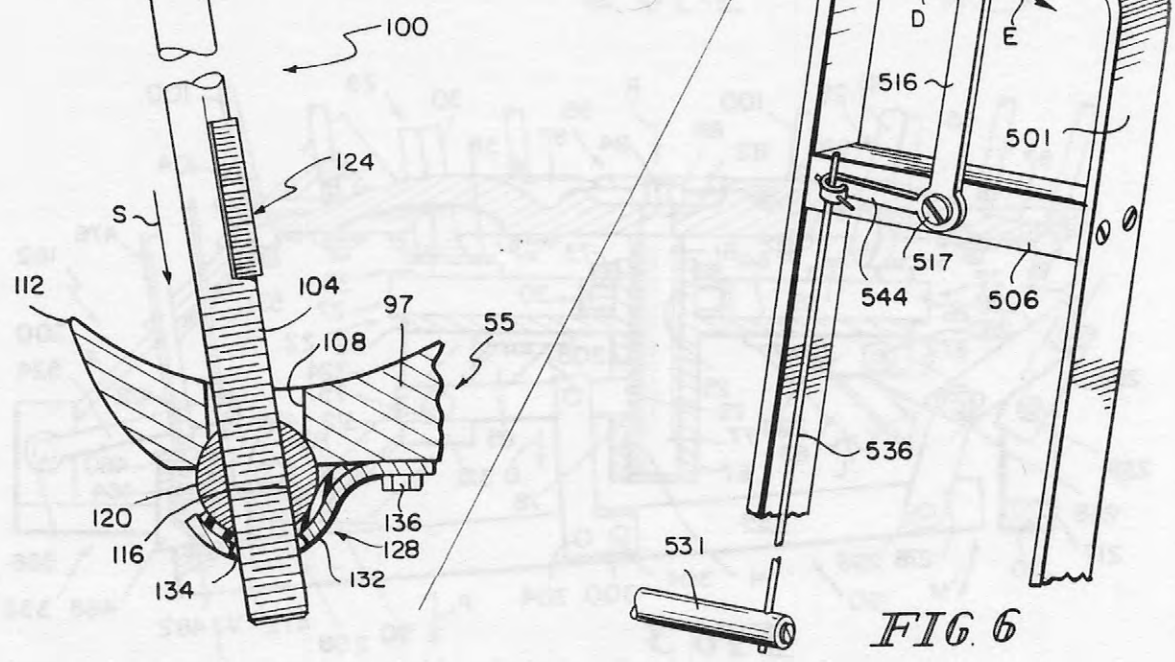

FIG. 6

KETTLEDRUM

This invention relates to musical instruments and more particularly to percussion instruments such as drums.

The acoustical properties of the round vibrating membrane which the player strikes in a musical drum to produce a sound are complex. In drums such as the bass drum, tenor drum, or snare drum, the indefinite pitch of the sound produced when the drum has been struck has usually been a desirable characteristic of the instrument. However, in the kettledrum or timpano, a strong sense of pitch has been required by musical compositions calling for a definite pitch from these drums. Unlike, for example, the string family which can be characterized by having an easily obtainable definite pitch, the goal of producing a drum with a definite pitch has been largely unachievable due to the properties of the acoustics of the vibrating membrane which characterizes the drum family.

Membranophones, the genus of timpani and all drums, are analogous to members of the string family in several ways. With both a string and a membrane, tension is the restoring force that makes the system vibrate after pressure is applied to the vibrating member (i.e., plucking or bowing in a string; striking a blow to the drumhead). With a string, the tension is applied linearly. With a circular membrane, such as is found in timpani, the tension is applied about the circumference of the membrane. In both, the greater the tension of the vibrating member, the higher the fundamental pitch or frequency of the sound produced. Both membranophones and strings are tuned by an alteration of the tension of the vibrating member.

However, major differences between the vibrations of an ideal string and an ideal circular membrane result in significant differences in the perceived and measured pitch definition and clarity of each instrument. The frequencies of a string's overtones are harmonics. Harmonics are integral multiples of the fundamental frequency. With the ideal membrane, these mode frequencies are inharmonic. Moreover, the nodes of a vibrating string (the positions along its length that remain stationary while the rest of the string is in motion) are one-dimensional. The nodes of the vibrating circular membrane however are two-dimensional. Therefore, whereas a vibrating string has nodal points, a vibrating membrane has nodal lines and nodal curves. The curves may be curved line segments and closed generally planar nodal curves. Hereinafter all of these are generally referred to as nodal lines for simplicity.

The number and complexity of these nodal lines reflect directly the complexity of the overall motion of the vibrating circular membrane. Increases in the number of nodes and the node frequency go hand in hand with increasingly complex vibratory motions. The increased complexity of resulting sound reflects the increased complexity of the nodes of vibration of the drum head.

A number of factors determines the fundamental node frequency of the circular membrane. These factors include the amount of tension applied to the membrane, the diameter of the membrane, and the characteristics of the material from which the membrane is made, since different materials have different densities. The tension of the membrane is proportionally related to the frequency, while the diameter and the density of the membrane are inversely proportional to the fundamental frequency produced. The frequency f_1 of the lowest mode of an ideal membrane is given by

$$f_1 = \frac{0.766}{D}\sqrt{\frac{T}{d}}$$

where T is the tension stretching the head in newtons per meter width, d is the density of the head in kilograms per square meter, (usually assumed to be constant throughout the membrane), and D is the diameter of the head in meters. Thus, the means for producing a desired fundamental frequency in a drum will be related to the tensioning apparatus, delimiters of the drumhead diameter, and the density of the material comprising the drumhead. However, the means for producing a definite and clear pitch which comprises the fundamental frequency and its related overtones or partials involves more than these variables of applied tension, membrane diameter, and membrane density.

Over a century ago, Helmholtz recognized that a musical tone conveying a clear sense of pitch must be made up of several strong harmonic overtones to have a rich, musical sound. This tone must have not only a fundamental frequency, but also overtones with the frequencies of these overtones related to the fundamental frequency in whole-number ratios. For any musical instrument, the overtones audible in addition to the fundamental pitch of the musical note being played are essential characteristics of the sound of the given instrument. Because of the complex acoustics of a round vibrating membrane, the characteristic sound of a timpano is well known to be a complex mixture of the fundamental pitch and various theoretically predictable, audible partial overtones. Moreover, Rayleigh, Taylor, Rossing, Benade, Hall, Backus, Tubis and others have shown that these partials are inharmonic with regard to the fundamental pitch being expressed. Although the addition of the kettle, which acts as a baffle for the vibrating circular membrane, has been shown in practice to alter the frequencies of these partials to make the overtones closer in some cases to the ratio of whole numbers necessary for a harmonic overtone series, no kettle has before been designed which approaches the definitiveness of pitch desired by timpani players.

For the timpani player, this inharmonic overtone series characteristic of timpani has resulted in compromises in trying to produce a definite pitch on an instrument which science has predicted cannot be tuned to a definite pitch.

One object of the present invention is to produce a tympanic instrument which more nearly achieves the goal of obtaining a definite pitch.

In accordance with the instant invention, a percussion instrument is provided which comprises a body member and a percussion head carried by the body member. Tensioning rods are provided along with means for operatively coupling the tensioning rods to the percussion head. A master tensioning member is provided for tensioning the percussion head. The master tensioning member has a central portion and leg portions extending radially outwardly from the central portion. Adjacent leg portions define an opening therebetween. Means are provided for coupling the tensioning rods to the master tensioning member.

Also in accordance with the instant invention, a percussion instrument is provided which provides a body

member, a percussion head carried by the body member, a tensioning member operatively coupled to the percussion head for exerting tension on the percussion head, and a piston operatively coupled to the tensioning member for moving the tensioning member to alter the tension on the head. Means are provided for moving the piston means. The piston moving means includes a movable first lever for moving the piston and a second movable lever operatively coupled to the first lever for moving the first lever. A shaft is provided which is rotatably supported by the frame. A first crank arm is fixed to the shaft for rotation therewith. A second crank arm is provided along with means for operatively coupling the second crank arm to the first crank arm and second lever. The first and second crank arms are cooperable for translating rotation of the shaft into generally linear movement of the second lever. Means are also provided for rotating the shaft.

The instant invention improves over prior art drums through the application of theoretical acoustics to alter the audible frequencies of the partials of a vibrating circular membrane so that these frequencies approach a harmonic series more nearly than possible with the prior art. This improvement has been possible in part through the design of a resonating, amplifying, and baffling member or drum body. Such design has been effected through the formulation of a relationship between the drum body volume, diameter, depth, and shape not previously conceived or executed in terms of kettle or drum body manufacturing. Additionally, the effects of damping, viscothermal and mechanical losses in the kettle itself have been factored into this formulation for use in kettle design in a manner not previously conceived in kettle design and manufacturing. This improvement in the design of the drum body is enhanced by improvements in certain other mechanical features of the timpano for the purpose of improving the pitch definition possible for a timpano of any diameter, tensioned to produce any desired fundamental frequency within its range. The means to these improvements and others will be disclosed in the following description of our invention.

In addition to the physical properties of drums which lack pitch clarity, several other problems have beset the manufacturers and users of prior art timpani. Among the several problems with known tympanic instruments are: the lack of tone clarity; the difficulty of "clearing" the timpano head; the rapid decay of a sound produced on a timpano; the impossibility of obtaining even tension at each percussion head tensioning point over the entire range of possible tensions; the restricted dynamic range of the drum if tone and pitch definition are to be maintained; the difficulty of adapting the timpani with ease to being played in various configurations or "set-ups" desired by the player; the variable resistance in the pedal movement requiring varying amounts of work by the player to obtain various pitches; the inability of individual players to choose preferred ankle-leg action combinations in operating the pedal; the inability of individual players to choose preferred distance between the pedal and the playing surface; the insecurity of the pedal locking mechanism and difficulty in unlocking a locked mechanism quickly for tuning changes; the complexity and difficulty of manufacturing the lever mechanism so that the fine tuning mechanism can be easily reached by the player; the inconvenience of the provisions of prior instruments for changing the relative position of the playing area of the timpano head; and the inconvenience and inconsistency of prior provisions for indicating the tuning positions of the timpano pedal.

It is also an object of the instant invention to provide an instrument which alleviates or eliminates the foregoing difficulties.

The present invention addresses these problems through fundamental changes in: the acoustical chamber of the timpano; the contact area between the vibrating membrane and the acoustical chamber; the support means of the acoustical chamber; the tensioning members of the timpano; the tensioning member system and the supporting means for the timpano; the tensioning member system and the central tensioning unit of the lever-pedal system of the timpano; the lever system of the timpano; the pedal system of the timpano; and the conjunction of the lever-pedal system of the timpano.

These and other features and advantages of the present invention will become apparent to those skilled in the art upon a consideration of the following detailed description of a preferred embodiment exemplifying the best mode of carrying out the invention as presently perceived. The detailed description particularly refers to the accompanying figures in which:

FIG. **1** is a partly broken away side elevational view of a kettledrum constructed according to the present invention, taken from the left side relative to the musician's position when playing the drum;

FIG. **2** is a partly broken away sectional view, taken generally along section lines **2—2** of FIG. **1**;

FIG. **3** is a partly broken away sectional view, taken generally along section lines **3—3** of FIG. **2**;

FIG. **4** is a sectional view of the pedal and lever arm of the instant invention, taken generally along section lines **4—4** of FIG. **2**;

FIG. **5** is an enlarged partly broken away view showing the membrane, kettle lip, counterhoop and tensioning attachments; and

FIG. **6** is a perspective view of the visual tension indicator.

FIG. **7** is a partly fragmentary top plan view of a pedal constructed according to the present invention; and

FIG. **8** is a sectional view of the pedal of FIG. **7**, taken generally along section lines **8—8** of FIG. **7**.

The instant invention is shown in the Figures embodied in a kettledrum **10**. However, particular aspects of the invention are adaptable to other musical instruments, for example, to other types of drums.

With particular reference to FIG. **1**, the kettledrum **10** includes a kettle bowl **13** constructed from copper sheet hammered over a form. This kettle bowl **13** can be described by an equation which relates the bowl depth, the diameter at the top of the kettle lip **16**, the bowl volume, and the shape of the bowl. The kettle bowl **13** shown in FIG. **1** has a generally parabolic shape. Alternatively, the kettle bowl **13** can have a spherical basin portion **14** and a generally linear side portion **15** or can have a generally part-spherical shape, or can have other configurations chosen to meet the sound criteria of the user. The variously sized bowls **13** of a set of several timpani are shaped according to the expected and desired pitch range of each drum so that the partials which the manufacturer or user wishes to emphasize in eacn drum **10** and the overlap in the fundamental pitches and partials among the drums **10** in a set of timpani are such that a matched set of drums **10** may be obtained. Such a set of drums is matched in terms of fundamental pitch, clarity, resonance, emphasis of desired partials, timbre,

and dynamic range. Each drum bowl **13** thus is an acoustic resonator whose dimensions, volume, and shape are determined within specified limits of mechanical tolerance by the manufacturer to suit the aforementioned purposes of musicality.

For a bowl or a kettle which is generally a quadratic paraboloid of revolution, the equations defining the bowl are as follows: $y=bx^2$, $b=D/R^2$ and $V=\pi R^2 D/2$, where V is the volume of the bowl or kettle, D is the depth at the center of the bowl and R is the radius of the bowl at its lip. Where the bowl is a quartic paraboloid of revolution, $y=bx^2+cx^4$, where $b=(4-1/S)D/2R^2$, $c=(1/S-2)D/2R^4$, and $V=\pi DR^2X(\frac{1}{3}+1/12S)$, where the other variables are as described above and S is a "shape" variable determined by the configuration of the bowl. Generally, S will vary between $\frac{1}{4}$ and $\frac{1}{2}$. Larger values of S indicate that the bottom of the bowl is relatively more pointed or conical, while smaller values of S indicate that the bottom of the bowl is flatter.

When $S=\frac{1}{2}$, $c=0$. This is the case for a quadratic paraboloid of revolution, since under the circumstances in which $c=0$, b reduces to $\pi D/R^2$ and V reduces to $DR^2/2$.

Depending on the specific characteristics desired by the manufacturer or user, such characteristics as timbre and tone may be further regulated by varying the materials used to make the bowl **13**. Characteristics of tone and timbre may be correlated to the damping and other characteristics of such materials as: electrolytic tough pitch copper; oxygen free copper; deoxidized copper; annealed copper; work-hardened hammered copper; spun copper; copper alloys; and various aluminum alloys, according to an equation which enables a manufacturer to make specialized acoustical chamber bowl **13** for numerous different musical needs. For some conditions and musical needs, the acoustical chamber bowl **13** may be manufactured from fiberglass-reinforced plastic.

Other considerations involved in the selection of the bowl shape are based upon the fundamental frequency relationship for an ideal membrane, discussed previously. Since tympanists typically choose drums based upon drum diameter to produce a particular fundamental, the kettle radius R is ordinarily the first value chosen. Subsequently, the bowl depth at the center, D in the formulae presented immediately above, must be determined. In determining this value, it is of assistance to consider the average wavelength of the expected pitches to be produced by a drum, and divide by **4** to get the quarter wavelength of the expected pitch for the drum. This will be the desired depth D of the bowl.

Experiments have indicated that for drums with larger radii R, the percentage of audible higher partials decreases as volume V increases. If p, the number of audible higher partials, or higher partials perceived by the listener, is considered an indication of the "brightness" of timbre of the drum, then for drums having larger radii R, volume V is inversely proportional to p. However, the opposite appears to be true for drums having smaller radii R. For these drums, volume V is generally proportional to p. The limit toward which both of these relationships tend appears to be 26.5 inches (67.3 cm.) or so. Therefore, in the determination of volume V for various drum radii R, the tastes of the user must be considered. If a "brighter" sound is desired, the relationships between V and p suggest what V will be acceptable for a given R. Although it is difficult to define quantitatively the relationship between V and p, a qualitative understanding of the interrelationship between V, R and p is of considerable assistance in defining drum dimensions. If a tympanist can reasonably describe p, this qualitative relationship permits fashioning of a drum which provides the desired characteristics.

With D, R and V determined, S, the shape constant, can be determined according to the formulae presented above.

Other experimental results have helped to determine other drum parameters, such as bowl material and the method of bowl manufacture. Again, many of these parameters are largely matters of the tympanist's tastes and the tympanist's ability to articulate these tastes. However, the relationships which follow are of some assistance in quantifying drum performance.

Among the determining characteristics in drum resonance are k, the velocity of sound waves in various materials (typically in m/sec). Resonance is believes to be inversely proportional to k. If j is the coefficient of damping in various materials from which the bowl can be fashioned, resonance is believed inversely proportional to j. Other factors affect timbre and tone quality of the drum. If i is defined as the percentage or number of inharmonic partials perceived or audible, p again is the "brightness" of the sound, the percentage or number of higher partials perceived or audible, n is the diameter of the vent hole in the bottom of the bowl, q is an "average" loudness or intensity level desired from the drum, w is the dynamic range (Δq, the difference between the loudest and softest audible sounds desired from the drum), m is the roundness of the bowl lip, and z is the flatness of the bowl lip, experiments tend to indicate that n is inversely proportional to p, q is inversely proportional to j, q is inversely proportional to k, w is inversely proportional to j, w is inversely proportional to k, m is inversely proportional to i, z is inversely proportional to m, and, for $\frac{1}{4}\leqq S\leqq\frac{1}{2}$, S is proportional to p.

The acoustical chamber bowl **13** further includes an annular, outwardly bent, downwardly opening lip or flange **16**. Kettle lip **16** is turned radially outwardly and radiused to form a contact bridge **17** (FIG. **5**) for supporting the vibrating portion **18** of drumhead **19**. The bridge **17** has a relatively narrow width, preferably 0.031 inches (0.79 mm) or less. The bridge **17** should have a substantially uniform width throughout the circumference of the annular kettle lip **16**, and is preferably formed to conform to its chosen size within a tolerance of ± 0.003 inch (0.0762 mm). The contact bridge **17**, and hence kettle lip **16** should also be as nearly circular as possible. Additionally, the contact bridge **17** should be made to be self-lubricating. This can be accomplished through the use of a strip **12** of self-adhering fluorocarbon resin applied to the bridge **17**. The use of a strip **12** of fluorocarbon obviates the problems caused by other lubricants such as graphite or cork grease, which often tend to flake, dampen or mute the sound of the drumhead.

The percussion head **19** closes the top opening of bowl **13**. The head **19** includes the generally circular vibratory portion **18** which is surrounded and captured by a rigid annular membrane gripping ring **20**. The drumhead **19** is supported on the kettle bowl **13** by the bridge **17**. The head **19** can be variably tensioned as will be described infra. The membrane **18** may be made of skin, plastic, or other suitable material and is customarily made of mylar or calf skin. Preferred embodiments

include calf hide with a so-called "German tuck," or mylar wrapped about a flesh hoop with a "German tuck" or an "American tuck," with a "tone ring" insert as described in U.S. Pat. No. 2,934,989 of Belli.

The membrane **18** is coupled to, and given its circular shape by, membrane gripping ring **20**, as shown in FIG. **5**. The tensioning of the head **19** for both general and fine tuning is accomplished by means of a circular tensioning ring, or counterhoop **21**, which includes an angled cross section member having a generally horizontally extending portion **23** and a generally vertically extending portion **24**. Portion **24** has an outside diameter ½ inch (1.27 cm) larger than the outside diameter of ring **20** to enable the ring **21** to capture the ring **20**, and the bearing surface **28** of horizontal portion **23** to rest upon the upper surface of the ring **20**. The bearing surface **28** is formed to be consistently flat and in direct engagement with the drumhead **19**. Thus, the bearing surface **28**, drumhead **19**, and kettle lip **16** are engaged so as to form a smooth round playing surface. The construction of bearing surface **28** and contact bridge **17** are such that the pressure used to tension the membrane **18** results in a planar playing surface without inconsistencies in its flatness, and witnin close tolerances of nearly perfect circularity.

The drum **10** further includes four rectangular tubular support arms **22** (FIG. **3**). Adjacent arms **22** are perpendicular to each other, with opposed arms **22** generally colinear with each other. The support arms **22** are preferably formed from a long member **26**, by then welding shorter, similarly shaped members **27** in opposed, perpendicular relation, at the center of the side surfaces of long member **26**. A right circular cross-section receptacle aperture **25** is formed through the walls of long member **26**, at the center of its junction with members **26**, **27**.

A generally upright support strut **29** is carried on each of the four support arms **22**. Struts **29** are spaced apart from each other to provide even support for the annular support ring **31** (FIG. **5**) which supports the kettle bowl **13**. Struts **29** are preferably made of steel or aluminum, either of which is sturdy enough to withstand the stress placed upon the struts **29** by the instrument **10**. Each strut **29** includes an elongated shaft portion **30**, a base portion **35** at its lower end, and a forked portion **37** at its upper end (FIG. **1**). The base portion **35** includes a planar bottom surface which rests on the top surface of one of the four support members **22**. The base portion **35** is bolted **38** to a respective arm member **22** to secure the struts **29** to the arms **22**. Shims can be interposed between the base **35** and the arm **22**, to compensate for any differences in length among the four support struts **29**. The shims can be made of a vibration absorbing material such as cloth to isolate the base **35** and support arm **22** from each other.

Each tine **40** of forked portion **37** includes a right-angled top receiving portion **41** for receiving the support ring **31**. An Allen screw **46** near the top of each tine **40** attaches the strut **29** to the support ring **31**. Each strut **29** is connected to the support ring **31** by the Allen screws **46** in a manner such that the top of the contact bridge **17** of kettle lip **16** is in a plane perpendicular to the vertical axis of bowl **13**.

The support ring **31** is formed as a circular strip of metal having an upper beveled edge **58** which is received by the underside of kettle lip **16**, a radially outer side surface **60** in contact with the tines **40** of support strut **29**, and a diameter substantially equal to that of the contact bridge **17**. The support ring **31** is as nearly circular as the lip **16** of bowl **13**. Additionally, the highest points of beveled edge **58** form a horizontal circle which engages the interior of lip **16**, to support the lip **16** and hence the bowl **13** evenly around the entire circumference of the support ring **31**. The width of the support ring's **31** beveled edge **58** at the point of contact with the lip **16** is 0.031 inch (0.79 mm) or less. The support ring **31** supports the kettle lip **16** only at a minimal contact area, thus reducing to a minimum the dampening of the resonance of the bowl **13** itself. The struts **29** and ring **31** are insulated from vibrational contact by a thin, fibrous cushion **61** of exact fit and flatness which is interposed between the tines **40** of the struts **29** and the outer side surface **60** of the supporting ring **31**.

A generally circular, disk-shaped base **62** includes a planar upper surface **64** upon which the undersides of the support arms **22** rest. As best illustrated in FIG. **3**, the base **62** includes a cylindrical tubular member **67**. The tubular member **67** extends vertically both above and below the base member **62**. The exterior surface **70** of the tubular member **67** is received within the circular central aperture **25** of the support structure **22**, to centrally position the support structure **22** on the upper surface **64** of base **62**. The circularity of the exterior surface **70** of the tubular member **67** enables the support arm structure **22**, and hence the bowl **13** and drumhead **19**, to be rotated about a vertical axis defined by the long axis of tubular member **67**. The upper end of tubular member **67** is threaded to receive a nut **73** which secures the support arms **22** to base **62**. This assembly technique also permits the bowl **13** to be removed from the base **62** to facilitate transportation of the drum.

The lower portion of the tubular member **67** (i.e. that portion disposed below base **62**) includes a guide window **74** through which a lever arm **75** passes for controlling the action of a piston **77** which is vertically movable within tubular guide member **67** to move the instrument's primary tensioning member, spider **55**, vertically. Vertical movement of spider **55** adjusts the tension of drumhead **19** membrane **18**, thus enabling the musician to change the pitch of the sound produced when the membrane **18** is struck. Preferably, the piston **77** and cylinder **68** within guide **67** are provided with no more than 0.003 inch (0.12 mm) clearance. Self-lubricating couplings (not shown) can be provided in tubular member **67** adjacent piston **77** to facilitate movement of the piston **77** along the interior surface **68** of the tubular member **67**. Gear teeth **78** are formed on the side surface of piston **77**, and are exposed through window **74** to be engaged by gear teeth **79** provided on lever arm **75**.

The shims between base **35** and arms **22** also aid to retain annular support ring **31** in a plane parallel to spider **55** and base **62**.

The upper end **81** of piston **77** includes a threaded socket (not shown) for receiving a spider guide shaft **82** which extends colinearly with piston **77** through a central aperture **84** formed in spider **55**. Shaft **82** is threaded at its upper end. A nut **86** is threaded onto the upper threaded end of the spider guide shaft **82** to secure the spider **55** to the piston **77**. The nut **86** is selectively tightenable on guide shaft **82**. By loosening nut **86**, and nut **73**, the user can rotate the spider **55**, support arm structure **22**, bowl **13** and drumhead **19** about an axis defined by the long axis of piston **77** and guide shaft **82**, to change the relative position of drumhead **19**. This feature enables the user to rotate the drumhead **19** when

a portion of the drumhead **19** becomes worn or damaged through use. By tightening nuts **86** and **73**, the user can securely position the spider **55** and support arm structure **22** to prevent such rotation of drumhead **19**.

The base **62** also includes foot connecting means, including four sets of threaded apertures **76** (FIG. **2**). A foot structure **80** is attached to plate **62** by means of bolts through threaded apertures **76**. Each foot structure **80** includes an elongate angle section **83** to the upper end of which is welded a plate **85**, and to the lower end of which is welded a plate **87**. The ends of the elongate central portion **83** are angled so that plates **85**, **87** are generally parallel to each other, but the foot structure **80** extends outward from the base **62** as well as downward from the base **62**. Additional bolts extend through threaded apertures provided in plates **87** to attach casters **92** to the undersides of plates **87**. Typically, casters **92** are swivelable and steerable to facilitate movement of the instrument **10**, and lockable to permit the user to secure the instrument **10** is a desired position.

Spider **55** includes a central section **95** and four generally "pie" shaped spokes **97** which radiate outwardly from the central section **95**. The spokes **97** and center **95** are unitarily formed into spider **55**. The struts **29** pass through radially extending slots **98** between the spokes **97** of spider **55**. The slots **98** permit a single size spider **55** to be used with drum bodies **13** of different sizes. To accomodate drum bodies **13** of different diameters, struts **29** must usually be repositioned either radially inwardly or radially outwardly on support structure **22**. The radially extending slots **98** permit the manufacturer to effect this variable positioning even though the struts **29** extend from below the spider **55** to above the spider **55**, and are radially inward from the radially outer ends **112** of spokes **97**.

The spider **55** is aluminum. As the spider **55** comprises the master tensioning member of the instrument **10**, it must be strong enough to withstand the stress imposed upon it by the stretching of membrane **18** over the contact bridge **17** of kettle lip **16**. It can be appreciated by those skilled in the art that the stress imposed on the spider **55** during the tensioning of the membrane **18** can be quite severe.

Each of the four spokes **97** of spider **55** is connected to the tensioning ring **21** and hence drumhead **19** by three circular cross-section tensioning rods **100**. The tensioning rods **100** are circumferentially uniformally spaced about the instrument, with clearance relative to the bowl **13**. The number of tensioning rods **100** per drum is determined by the diameter of the drumhead **19** of the instrument **10**. In the embodiment shown, twelve tensioning rods **100** are used on a drumhead having a diameter ranging from 27–34 inches (68.6–86.4 cm). The number of tensioning rods **100** used per drum of a given diameter is determined by computing an optimal intersection of variables which reflects the overlapping points of tensioning force and the difficulty of tensionin9 each rod **100** equally to all others. Specifically, the evenness of force exerted on the membrane **18** is proportional to the number of points at which tensioning force is exerted. However, as the number of tensioning points increases, so does the user's difficulty in tensioning each point equally with the other tensioning points. Thus, an optimum between these variables should be struck for each membrane diameter. On drums with diameters of 18 inches (45.7 cm) to less than 27 inches (68.6 cm), eight tensioning rods are sufficient. On drums with diameters 27 inches (68.6 cm) to 34 inches (86.4 cm), twelve tensioning rods are used.

Each tensioning rod **100** includes a threaded lower end **104** which passes through an aperture **108** formed through a respective spoke **97** of spider **55** near its radially outer end **112**. The threads of lower end **104** engage a threaded aperture **116** of cylindrical nut **120**. The threaded aperture **116** of nut **120** extends generally transverse to the long axis of the nut **120**. Preferably, the portion of the underside of spider **55** adjacent the pivot nut is formed to include a part-cylindrical depression in which the nut **120** can nest to enable it to be somewhat pivotable in the part-cylindrical depression. This aids in the operation of the drum. The spider **55** design permits the same size spider **55** to be used for all sizes of drums and with either eight or twelve tensioning rods **100**. The part cylindrical depressions maintain uniform spacing of the tensioning rods **100**, whether eight or twelve rods are used. Engagement of the nut **120** in a part-cylindrical depression also prevents rotation of the nut **120** on the rod **100** as the rod **100** is rotated to adjust the tension of drumhead **19**. A depth caliper guide **124** (FIG. **5**) is provided near the lower threaded end **104** of each rod **100**. The depth caliper guide **124** facilitates the vertical positioning of the tensioning rods **100** by providing an adjustment reference point, thereby aiding the musician in adjusting all of the tensioning rods **100** so that equal distances are maintained between the spider **55** and the tensioning ring **21** all the way around the drum **10**.

Aperture **108** is sized and positioned to maintain the tensioning rod **100** which passes therethrough in a substantially vertical orientation when the tensioning rod **100** is disconnected from the tensioning ring **21**. Additionally, the rod **100** can be maintained in its position in aperture **108** by a clip **128** which includes an arcuate portion **132** which captures the nut **120**, and an aperture **134** through which the tensioning rod **100** passes. The clips **128** are mounted to the underside of spider **55** by bolts **136**. Clips **128** are insulated against the transfer of noise by pads of fibrous material, illustrated in FIG. **5**.

The downwardly directed force exerted on ring **21** by the tensioning rods **100** is translated into a downward force on the drumhead through the connection of the tensioning rods **100** with the tensioning ring **21** through counterhoop brackets **140**. A counterhoop bracket **140** is provided for each of the tensioning rods **100**. Each counterhoop bracket **140** includes a finger **144** which has a horizontal underside surface **148** which contacts on the upper surface of the horizontal portion **23** of ring **21**. Each finger **144** includes an aperture through which a countersunk Allen screw **150** passes. The Allen screw **150** threadably engages a corresponding aperture **151** in the horizontal portion **23** of tensioning ring **21** for securing the counterhoop bracket **140** to the tensioning ring **21**.

The lower portion **154** of counterhoop bracket **140** is slotted to receive the upper end portion **158** of a tensioning rod **100**. The upper end **158** of tensioning rod **100** includes a cylindrical collar **162** which is placed over the end of the rod **100** and secured thereto by a setscrew **166**. A square head **168** is formed at the end of each rod **100**.

The lower portion **154** of counterhoop bracket **140** includes a radially inner surface **169** which is generally parallel and adjacent to the vertical portion **24** of tensioning ring **21**, and a radially outer surface **170**. Outer surface **170** includes a generally vertical slot **174** within which the upper end of a respective tensioning rod **100**

is housed. An arcuate ridge **178** is formed on the wall of slot **174**. Ridge **178** serves as a seat **178** for the collar **162** of tensioning rod **100** for connecting the tensioning rod **100** to the counterhoop bracket **140** and hence to the tensioning ring **21** and drumhead **19**. The axially upwardly facing surface of the ridge **178** upon which collar **162** rests is preferably planar and angled slightly from a plane parallel with the spider **55** such that when the collars **162** of the rods **100** rest squarely upon their respective ridges **178**, the lower ends **104** of the rods **100** are positioned to extend through their respective apertures **108**. Through this arrangement, the force exerted on the drumhead **19** by the spider **55** through the tensioning rods **100** is directed downwardly in a vertical plane through the vertical movement of the piston **77**, spider **55**, tensioning rods **100** and drumhead **19** so that there is no radially outwardly directed torque or twist at the tensioning ring **21** and counterhoop brackets **140**.

The tensioning rods **100** can be removed from engagement and replaced into engagement with their respective counterhoop brackets **140** by moving the rods laterally through their respective slot **174**. This procedure obviates the laborious and time-consuming procedures required for drum disassembly and assembly by some prior art drums. The head assembly **19** may be removed and reseated or changed without retensioning the tensioning rods **100** relative to the spider **55** and, if so desired, without changing the head assembly's **19** position relative to the tensioning ring **21** and kettle bowl **13**.

A "cleared" timpano head **19** may be maintained throughout such change with greater ease than in prior art drums. With the instant invention, it is possible to remove a worn drumhead **19** and substitute a new one; to replace a drumhead **19** to place it into the same condition it was in before adjustment (if adjustments were made); or to turn the drumhead relative to the kettle (in addition to permitting rotation of the head and kettle together about the kettle's axis as described above).

A socket wrench is used to engage the square head **168** of each tensioning rod **100** to rotate the threaded end **104** of the rod **100** in the threaded aperture **116** of its respective nut **120** to adjust the tension exerted on the membrane **18** of drumhead **19**. An integral key member (not shown) can be provided for this adjustment. Where an integral key member is provided, the key member should be positioned well below the playing surface of membrane **18** or the playing area delimited by a set of timpani. As can be appreciated, the adjustment of the tensioning rods **100** can be used to differ the tension of different areas of the membrane **18**, or to equalize the tension on all areas of the membrane **18**.

It is contemplated that the user will normally rotate the tensioning rods **100** to adjust the tension on the membrane **18**, and hence the pitch of the drum **10**, at times such as when a new drumhead **19** is being fitted onto the instrument **10**, or before a performance. During the course of a performance, a tension-adjusting means **182** is provided which enables the user to rapidly and accurately adjust the tension exerted on the drumhead **19**, and thus the pitch of the sound produced by striking the membrane **18** of drumhead **19**. This tension-adjusting means **182** is best shown in FIGS. **2–4**.

Tension-adjusting means **182** comprises a frame **186** for supporting the tension-adjusting means **182** and a lever system **190** which is supported by frame **186**. Lever system **190** is provided for moving the piston **77** which, through its engagement with spider **55**, tensioning rods **100**, and counterhoop tensioning ring **21**, adjusts the tension exerted on membrane **18** of drumhead **19**. The tension-adjusting means **182** also includes a pedal mechanism **196**, which is best shown in FIGS. **2** and **4**. The pedal mechanism **196** enables the musician to actuate the lever system **190** by foot pressure and hence change the tension exerted on drumhead **19**. A hand-operable lever system actuating means **200**, which is best shown in FIGS. **1–3**, enables the musician to actuate the lever system **190** to change the tension exerted on drumhead **19** by movement of the musician's hand. The hand-operable lever system actuating means **200** is best utilized for enabling the musician to make fine adjustments to the pitch of the drumhead **19**. A visual indicating means **204**, which is best shown in FIGS. **1** and **6**, is provided for visually indicating to the musician the pitch setting of the drum **10**.

The frame **186** includes a first main frame member **208** which extends between, and is fixed to the top surfaces **90** of, the plates **87** associated with two of the feet **80**. A second main frame member **210** extends generally parallel to first frame member **208** between the plates **87** of the other pair of feet **80**. Bolts **216** fix the frame members **208, 210** to the plates **87**. The frame members **208, 210** are aluminum. Cross frame members (not shown) can be fixed between the main frame members **208, 210** and be disposed generally perpendicularly thereto to provide additional support for frame **186** if necessary. Frame member **210** is provided with a pair of spaced, parallel upstanding legs **217**.

Lever system **190** is supported by the frame **186** and includes a pedal-actuable, rockshaft actuating first lever arm **226**. The first end **235** of lever arm **226** includes an aperture **237** which receives a rockshaft **239**. The second end **228** of lever arm **226** includes a guide roller follower **232** which is rotatably journaled by an axle **231** onto the free end **228**. A pin **242** fixes the first end **235** of lever arm **226** to the rockshaft **239** so that the lever arm **226** pivots on the rockshaft **239** axis to rotate rockshaft **239**. Rockshaft **239** is rotatably journaled in aligned apertures (not shown) in upstanding legs **217** of second frame member **210**. Bearings can be provided in such apertures to facilitate rotation of the rockshaft **239**.

Collars **248** are fixed to rockshaft **239** by setscrews (not shown) to maintain the rockshaft **239** in its proper orientation with respect to legs **217**, and to prevent the rockshaft **239** from becoming disengaged from legs **217** by sliding laterally out of the apertures.

A first crank arm **252** is fixed to rockshaft **239**. A key or pin (not shown) is provided for fixing crank arm **252** to the rockshaft **239**. Parallel crank arms **258** are pivotally coupled to crank arm **252** by a pivot pin **262** which passes through aligned apertures in crank arm **252** and crank arms **258**. A pivot pin **268** extends through apertures (not shown) in crank arms **258** and an aperture in a pivot guide link **272** to couple the pivot guide link **272** pivotally with the crank arm **258**. Thus, the crank arms **258** are pivotally coupled both to the crank arm **252** and to the pivot guide link **272**. The pivot guide link arm **272** restricts and defines the movement of crank arms **258**, so that, as shown in FIG. **3**, clockwise movement of crank arm **252** is transmitted into generally downward movement by crank arms **258**. Pivot guide link **272** is pivotally mounted to base **62** by an inverted U-shaped channel member **284** by a pivot pin **280** which passes through aligned apertures in the pivot guide link **272** and the vertical legs of channel member **284**. Channel member **284** is fixed to the underside of base **62**. Pivot

pin **268** also pivotally couples crank arms **258** and guide link **272** to a crank arm **276**. Crank arm **276** pivotally engages a main transmission lever arm **294**. A pivot pin **298** extends through aligned apertures in crank arm **276** and main transmission arm **294** to pivotally couple the arms together.

Upstanding, L-shaped brackets **300** are fixed to both sides of transmission arm **294** by bolts **304**. A pin **308** pivotally connects the L-shaped brackets **300** to lever arm **75**, to translate vertical movement of arm **294** into vertical movement of lever arm **75**. As discussed, lever arm **75** includes teeth **79** which engage teeth **78** on piston **77**, so that movement of lever arm **75** results in movement of piston **77**. Lever arm **75** extends through a vertically extending slot in, and is pivotally mounted by pivot pin **312** to, a housing **315** integral with base **62**.

The pedal mechanism **196** includes a platform **332** (FIG. **4**) pivotally supporting a pedal **336** which is actuable by the user's foot for tensioning the drum head **19**, and means **340** for fixing the pedal **336** position for enabling the user to set the pedal mechanism **196** at a predetermined position, and hence fix the drumhead **19** at a predetermined tension to achieve a desired pitch when the membrane **18** is struck. Although the pedal mechanism **196** is shown on the right side of the instrument **10** with respect to the musicians playing position, it will be understood by those skilled in the art that the pedal mechanism **196** can be disposed on the left side of the drum **10** according to the user's preference.

The platform **332** includes spaced, parallel frame members **348** which are fixed to frame member **208** and extend generally perpendicular thereto. Bolts **352** fix frame members **348** to frame member **208**. A base plate **354** extends between frame members **348** in spaced, parallel relation to frame member **208**. Base plate **354** includes spaced, upstanding legs **362** which are attached to the top of the base plate **354**. Legs **362** include aligned apertures (not shown) which pivotally receive a pedal rockshaft **366**. Collars **370** are fixed to the pedal rockshaft **366** to fix the lateral position of rockshaft **366** to prevent the rockshaft **366** from becoming disengaged from legs **362**. Bearings can be interposed between the rockshaft **366** and legs **362** to facilitate pivotal movement of rockshaft **366**.

Rockshaft **366** is fixed by Allen screws **378** to a heel plate portion **382** of pedal **336**. Heel plate **382** is generally planar and includes a wider heel portion and a narrow arch portion **386** which extends generally colinear with the long axis of pedal **336**, along the entire length of pedal **336**.

A forefoot plate **390** having a narrow arch portion and a wider toe portion is adjustably mounted to heel plate **382** by a swivel pin **392**, which permits the forefoot plate **390** to swivel about the axis of the swivel pin **392** laterally in an arc as indicated by arrows B and C (FIG. **2**). The forefoot plate **390** has three detents, one left, one center and one right provided at its surface adjacent heel plate **382**. Heel plate **382** includes a threaded bore in which a spring-loaded ball is captured by a threaded plug. The ball snaps into engagement with one of the detents to secure the forefoot plate **390** selectively in either the left, center or right position with respect to the heel plate **382**. As best shown in FIG. **2**, the axis of swivel pin **392** is generally perpendicular to the plane of upper foot engaging surface **400** of pedal **336**. Side members **398** extend upwardly above the upper, foot engaging surface **400** of forefoot plate **390**. Side members **398** help retain the user's foot on the upper surface **400** of the forefoot plate **390**. The side members **398** also provide a vertical surface against which the user can exert a force to cause the forefoot plate **390** to swivel about the axis of swivel pin **392**. One of the side members **398** is fixed and the other side member **398** is adjustable outward and inward so that the usable width of forefoot plate **390** can be adjusted to the musician's foot size. Attachment of the adjustable side member **398** is by means of springs which urge the adjustable side member outward away from forefoot plate **390** and screws which hold adjustable side member **398** onto forefoot plate **390**.

A slotted guide **402** is fixed to the underside of heel plate **382**, and extends generally the entire length of the pedal **336**. The guide **402** comprises a runway surface upon whicn the guide roller **232** rolls when the pedal **336** is depressed and released, thus serving as a movable fulcrum. The upstanding rib of the guide **402** is slotted at **403** and the axle **231** of guide roller **232** extends through the slot **403** to fix the relative positions of guide roller **232** and slot **403**. Channel **402** and guide roller **232** cooperate to create a movable fulcrum which increases the mechanical advantage of the lever system **190**, which serves to result in a greater force being applied to the lever system **190** by the player's foot through the downward arc travelled by the pedal **336**.

The movable fulcrum permits a player to exert a substantially equal amount of force through the arc of the pedal **336**, while the lever system **190** exerts an increasing amount of force on drumhead **19**. This eliminates the need for increasing force to perform the necessary work to achieve a tighter drumhead **19** and higher musical pitch as the pedal **336** is depressed. Prior to the instant invention, the player had to use more force for each successively higher pitch due to the increasing tightness of the drumhead **19**. The increasing tightness of the drumhead **19** required the player to move a pitch pedal against increased drumhead tension. The movable fulcrum of the instant invention increases the mechanical advantage of the lever system **190**, and results in the player being able to apply a smooth, even force over the entire playable range of the drum **10**. Additionally, the pedal **336** is disposed at an angle relative to the ground to have only a moderate slope in its median position. This feature better enables movement of the pedal through the pivoting of the musician's ankle joint, rather than through leg and hip joint movement, to move the pedal **336**.

A shim can be interposed between the parallel frame members **348** and the base plate member **354** to raise the heel end of pedal **336**, and thus decrease the angle of the pedal **336** relative to the ground to accommodate users of different heights, different playing styles (e.g., standing or sitting), various multi-percussion set-up demands, or different desired combinations of ankle and leg movement in the depression and release of the pedal **336**.

The means **340** for locking the pedal **336** in position includes an L-shaped base plate **416** having a horizontally disposed leg **418** which is fixed to the underside of base **62**, and a vertically disposed leg **420**. A positioning arm **426** is fixedly attached to the vertically disposed leg **420** by bolts **429**. Positioning arm **426** is generally set at aoout a 25° angle to vertical, and includes a pedal position fixing portion such as an arcuate row of teeth **434**. The curve of the arc is parallel with the arc described by the distal end of forefoot plate **390** of pedal **336**, to maintain the teeth **434** at an approximately equal spac-

ing from the distal end of the forefoot plate **390** throughout the arc described by the pedal **336** as it is depressed and released. A tooth plate **440** is formed on, or fixed to, the distal end of the forefoot plate **390** and extends generally colinear with the long axis of pedal **336**. The tooth plate **440** is sized and positioned to be engageable with a tooth of the arcuate row of teeth **434** to enable the user to engage the tooth plate **440** and hence the pedal **336** with a tooth **434** and fix the position of the pedal **336**. In a preferred embodiment, the tooth plate **440** is selectively attachable to the forefoot plate **390** to enable a user to replace the tooth plate **440** if it becomes worn. The tooth plate **440** is engageable with a selected tooth **434** when the ball in the heel plate engages the center position detent in the forefoot plate **390**.

The hand-operable lever-actuating means **200** enables the user to adjust the tension of the drumhead **19** over a continuum to make fine adjustments in the pitch of the drumhead, or to finely tune the instrument between the broader pitch stops defined by the positions of the teeth **434** of the pedal mechanism **196**.

The hand-operable lever-adjustment means **200** includes a platform **452** having a pair of spaced, parallel frame members **454** which are fixed by bolts **458** to frame member **208**, and extend generally perpendicular thereto. A cross brace frame member **460** is fixed to frame members **454**, and extends between the frame members **454**. Cross brace frame member **460** is disposed generally perpendicular to frame member **454** and generally parallel to first main frame member **208**. Cross brace member **460** includes a central aperture **464** directly above the lever arm **294**. Legs **468** extend vertically downwardly from cross brace **460** and include aligned apertures (not shown) through which is journaled a pivot nut **472**. Pivot nut **472** has a threaded aperture which is disposed transversely to the pivot nut **472** long axis.

An adjustment rod **476** has a threaded lower portion **478** which passes through central aperture **464** in cross brace member **460**, and is threadably received in pivot nut **472**. The lower end **482** of adjustment rod **476** includes a spherical bearing which urges against the surface of a stainless steel insert provided in the upper surface of transmission arm **294**, so that vertical movement of adjustment rod **476** moves lever arm **294** which, through bracket **300**, lever **75**, piston **77**, spider **55**, rods **100**, and counterhoop tensioning ring **21**, adjusts the tension, and hence changes the pitch of membrane **18**. The position of adjustment rod **476** is changed by the rotation of adjustment rod **476** in pivot pin **472**. To adjust the rod **476**, the user rotates the adjustment rod **476** by turning a socket wrench **492** which has a squared socket **496** which receives a squared head at the top of the adjustment rod **476**. Adjustment rod **476** is generally similar in configuration to tensioning rod **100**.

The means **204** for visually indicating the pitch setting of the drum **10** includes an inverted U-shaped frame having legs **500, 501** which extend upwardly to a point just below the support ring **31**, and are fixed to the frame members **454** of platform **452** by bolts **502** (FIG. **1**). Legs **500, 501** are joined by a cross bar **506** which maintain the support members **500, 501** in a spaced, parallel relation. The central portion of the U includes an arcuate, tension-indicating gauge surface **508**. The tension-indicating gauge surface **508** includes markings **512** to assist the user to read the position of a pointer **518** of a gauge needle **516**. Preferably, the gauge surface **508** can be made of a markable material, upon which the user can mark, such as with crayons, one or more points corresponding to one or more selected pitches of the head **19**. This enables the user to reproduce this selected pitch at a later time.

As is shown best in FIG. **1**, the gauge surface **508** is disposed only slightly lower than the playing surface of membrane **18**, adjacent the key **492** of adjustment rod **476**, and just to the left of pedal **336**. The proximal placement of the membrane **18** visual indicator gauge surface **508**, key **492**, and pedal **336** enables the user to make changes in the tension and hence pitch of the drum through the foot-operable **196** actuating means while being able to keep track of the amount of tension exerted on the membrane **18** by reading the position of the gauge surface **508**, without being distracted from the conductor, musical notation, or the playing surface of the membrane **18**.

Gauge needle **516** is pivotally attached to cross bar **506** by a pivot pin **517**. The gauge needle **516** is moved along gauge surface **508** in response to movement of pedal **336**. The movement of pedal **336** rotates pedal rockshaft **366**. The rotation of pedal rockshaft **366** rotates a crank arm **524** which is fixed to the rockshaft **366**. When viewed as in FIG. **3**, the depresssion of the pedal causes the crank arm **524** to rotate counterclockwise. This moves a transmission arm **531** vertically downwardly.

As best shown in FIG. **6**, a link **536** is secured to the transmission arm **531** near the end of the transmission arm **531** opposite to the end upon which crank arm **524** is journaled. Downward movement of transmission arm **531** causes a downward movement of link **536**, which causes a downward movement of a crank arm **544** on the needle **518** movement. The downward movement of link **536** thus causes indicator needle **516** to move in a counterclockwise direction, as viewed in FIG. **6**, as indicated by arrow D. As can be appreciated, when pedal **336** is released the indicator needle **516** will move in a clockwise direction as indicated by arrow E.

In operation, the lever system **190** and foot-operable lever system actuating means **196**, operate as follows.

Referring now to FIG. **2**, wherein the pedal **336** is viewed from the top, the user places the heel portion of his foot on the heel plate **382** of the pedal **336**, and his forefoot on the upper surface **400** of forefoot plate **390**. The user then moves the pedal in one of the directions indicated generally by arrows B and C to disengage the tooth **440** from the arcuate row of teeth **434** (FIG. **4**). Because the forefoot plate **390** is swivelable both to the left and the right of the arcuate row of teeth **434**, engagement and disengagement of the tooth **440** with teeth **434** is facilitated for different users who may feel more comfortable moving the forefoot plate **390** to one side or the other. When the tooth **440** of forefoot plate **390** is disengaged from teeth **434**, the user depresses the pedal **336** to raise the pitch of drumhead **19**. The pedal is depressed in an arc indicated generally by arrow F, as shown in FIG. **4**. As the pedal **336** is depressed, guide roller **232** rolls along the runway surface of guide channel **402** in the direction indicated generally by arrow G, to create a movable fulcrum for aiding the user to depress the first lever arm **226**. As the user depresses the pedal **336**, and thereby moves the guide roller **232** along guide channel **402**, lever **226** is moved downwardly in a direction indicated generally by arrow H. The fixed attachment of lever arm **226** to rockshaft **239** causes the

rockshaft **239** to rotate in a clockwise direction as indicated generally by arrow I.

As best shown in FIG. **3**, the clockwise rotation of rockshaft **239** causes crank arm **252** to move in a clockwise direction, as indicated generally by arrow K. The clockwise rotation of crank arm **252** causes crank arms **258** to move in a generally laterally and downwardly direction as indicated by arrow L. Through the pivotal connection of crank arms **258** to guide link member **272** and crank arm **276**, crank arm **276** is caused to move in a generally downwardly direction as indicated by arrow M. The pivotal connection of crank arm **276** to lever transmission arm **294** causes the lever transmission arm to move generally downwardly and arcuately as indicated by arrow P. The downward movement of lever transmission arm **294** moves lever arm **75** downwardly as indicated generally by arrow Q. Lever arm **75**, through its connection to piston **77** by teeth **78**, **79**, moves piston **77** downwardly inside cylindrical tubular member **67**. Piston **77**, through its connection to guide shaft **82** and nut **86**, moves spider **55** vertically downwardly in a direction indicated generally by arrow R.

Referring now to FIG. **5**, the downward movement of spider **55** causes the tensioning rods **100** to move downwardly as indicated by arrow S. The downward movement of tensioning rods **100** exerts a downward force on counterhoop brackets **140** which in turn exerts a downward force on counterhoop tensioning ring **21** and membrane **18** gripping ring **20**. The gripping ring **20** is forced generally vertically downwardly in a direction indicated by arrow T. The spider member **55** moves all tensioning rods **100** downwardly. The downward movement of spider **55** and tensioning rods **100** moves the membrane gripping ring **20** downwardly. The downward movement of gripping ring **20** exerts a lateral force on membrane **18** in a direction indicated generally by arrow U, stretching the membrane **18** across the contact bridge **17**. As the downward force on gripping ring **20** is exerted substantially equally about the circumference of the ring **20**, the lateral force exerted on the membrane **18** will be substantially equal throughout the circumference of the membrane **18**. This equality of exerted force results in the tension on membrane **18** being changed equally at all points, which enhances the ability of the musician to achieve a desired change in pitch from the membrane **18**. Additionally, because the pedal mechanism **196** and hand-operable lever-actuating means **200** activate lever transmission arm **294**, which through piston **77** exerts a straight line force on the master tensioning member, spider **55**, the initial adjustments made to the membrane **18** through the adjustment of tensioning rods **100** will be maintained throughout the range of tension applied by the pedal mechanism **196** and hand lever system actuating means **200**. This advantage is not available with prior art systems which pulled their master tensioning members arcuately downwardly to adjust the tension of the drumhead **19**. The arcuate movement of prior art master tensioning members often resulted in the over-tensioning of some portions of prior art drum's membranes, and the under-tensioning of other portions of their membranes.

When the user achieves a desired pitch through the movement of pedal **336**, the forefoot plate **390** can be swiveled to a position wherein the tooth **440** engages one tooth of the arcuate row of teeth **434** of positioning arm **426**. The engagement of the tooth **440** with the teeth **434** causes the desired tension to be maintained on membrane **18**, thereby enabling the user to reproduce the desired sound when striking the membrane **18**. It can be appreciated that when the pedal **336** is released, and allowed to move upwardly, the above-described sequence is reversed. Since the membrane **18**, when in use, is always under tension, the tendency of the membrane **18** is to exert a radially inwardly directed force on the gripping ring **20** to cause the tensioning ring **21**, tensioning arms **100**, spider **55**, and piston **77** to be pulled upwardly. Therefore, as the pedal **336** is connected to the piston **77** through the pedal mechanism **196**, it can be appreciated that the natural tendency of the pedal **336**, when not engaged with teeth **434** of the positioning arm **426**, is to move in a clockwise (upward) direction (when viewed as in FIG. **4**).

The hand-operable lever actuating means **200** operates as follows. Referring now to FIGS. **1** and **3**, the user rotates key **492** in a clockwise direction to rotate adjustment rod **476** in a clockwise direction. The clockwise rotation of adjustment rod **476**, as viewed from above the drum, moves the rod **476** downwardly, through the threaded engagement of rod **476** to pivot nut **472**. The downward movement of rod **476**, through the contact of the lower end **482** of rod **476** with the lever transmission arm **294**, moves the lever transmission arm **294** downwardly in a direction indicated generally by arrow V. The downward movement of lever transmission arm **294** moves the bracket **300**, lever arm **75**, and piston **77** downwardly in the same manner as they are moved downwardly when actuated by the downward movement of pedal **336**. As can be appreciated, the counterclockwise rotation of the adjustment rod **476** raises the adjustment rod **476** upwardly, causing the above-described sequence to be reversed, and hence the tension exerted on membrane **18** to be decreased.

It should be understood that, in addition to release of the tension on the drumhead by rotating tensioning rods **100**, the user can release the tension on the spider **55** by moving the pedal **336** to its lowest tension position and/or by releasing the tension applied by the fine tuning adjustment rod **476** (depending upon the actual positions of tensioning rods **100**, one or both of these adjustments may be necessary). When tension is released from spider **55**, the user can lift each tensioning rod **100** from its counterhoop bracket **140** by unseating its collar **162** and pulling the rod **100** from its slot **174**. If the adjustments to spider **55** were not enough to relieve the tension on tensioning rods **100** so that they could be removed, nut **86** can also be loosened. (If nut **86** must be loosened to effect disassembly, then nut **86** was too tight when the drum was assembled.) The tensioning rods **100** thus do not have to be completely removed from spider **55** to disassemble the drum. If the drum is in proper adjustment, the tensioning rods **100** should not have to be retensioned or disengaged from the spider **55**. Releasing of the tension provided by the pedal **336** from the spider **55** should be enough to permit disassembly.

What is claimed is:

1. A percussion instrument comrising

a body member comprising an inner surface which comprises a quartic paraboloid of revolution,

a percussion head carried by the body member,

tensioning rods,

means for operatively coupling the tensioning rods to the percussion head,

a master tensioning member for tensioning the percussion head, the master tensioning member having

a central portion, leg portions extending radially outwardly from the central portion, adjacent leg portions defining an opening therebetween, and

means for coupling the tensioning rods to the master tensioning member.

2. The invention of claim 1 wherein one of the leg portions includes an upper surface, a lower surface, an aperture for receiving one of the tensioning rods, and a depression formed in the lower surface adjacent the aperture, and

the means for coupling the tensioning rod to the master tensioning member comprises a fastener which is nestable in the depression for preventing rotation of the fastener when the tensioning rod is rotated.

3. The invention of claim 1 further comprising a tensioning rod position indicating means for indicating the tension between at least one of the tensioning rods and the master tensioning member.

4. The invention of claim 1 wherein the percussion head comprises a tensioning ring member and the means for operatively coupling the tensioning rods to the percussion head comprises a bracket member connected to the tensioning ring member, the bracket member including a seat portion engageable with the tensioning rod and a slot for permitting the tensioning rod to be moved laterally into and out of engagement with the seat portion.

5. The invention of claim 4 wherein the bracket member includes means for selectively attaching the bracket member to the tensioning ring member.

6. The percussion instrument of claim 1 wherein the quartic paraboloid is one defined generally by the equation

$$y=bx^2+cx^4$$

where b and c are constants at least partially related to the maximum radius defined by the inner surface and the desired depth of the inner surface.

7. The percussion ihstrument of claim 6 wherein $b=(4-1/S)D/2R^2$ and $C=(1/S-2)D/2R^4$, D being the desired depth of the inner surface, R being the maximum radius of the inner surface and $\frac{1}{4}\leqq S\leqq\frac{1}{2}$.

8. A percussion instrument comprising

a base having an upper surface and a lower surface,

a support structure rotatably carried adjacent the upper surface of the base, the support structure including a plurality of radially outwardly extending arms,

a plurality of support struts coupled to the support structure for rotation therewith,

a body,

a supporting ring for supporting the body, the supporting ring coupled to the support struts for rotation therewith,

a percussion head carried by the body,

a plurality of tensioning rods operatively coupled to the percussion head, and

a master tensioning member disposed above the support structure and operatively coupled to the tensioning rods for exerting tension on the percussion head, the master tensioning member including a central portion, and spokes extending radially outwardly from the central portion, the spokes defining openings therebetween through which respective ones of the support struts pass, the supporting ring being supported above the master tensioning member,

the supporting ring including a first radially outer surface and a second radially inner surface which intersect each other to form a vertically upper beveled edge portion and the body including a peripheral lip for receiving the beveled edge portion to support the body.

9. A percussion instrument (10) comprising

a base (62) having a central cylindrical tubular member (67), the tubular member (67) having an interior, an exterior (70), an upper portion extending above the base (62), and a lower portion extending below the base (62),

a plurality of feet (80) for supporting the base (62),

a support arm structure (22) having a plurality of radially outwardly extending arms (26, 27) and a central aperture (25) for receiving the exterior surface of the upper portion of the cylindrical tubular member (67),

a plurality of support struts (29), each strut having an elongated central portion (30), a lower portion (35) fixed to one of the support structure arms (26, 27), and an upper portion (37),

a support ring (31) fixed to the upper portions (37) of the support struts (29), the ring (31) including a beveled upper edge (58),

a body member (13) having a radially outwardly directed lip (16), the lip (16) including a bridge portion (17) and a support ring-receiving portion for receiving the beveled edge (58) of the support ring (31),

a drumhead (19) including a membrane (18) which extends over the bridge portion (17) of the body lip (16) and a gripping ring (20) for gripping the membrane (18), the gripping ring (20) radially outward from the bridge (17),

a tensioning ring member (21) having a portion (23) disposed above the gripping ring (20) for exerting a downwardly directed force on the gripping ring (20),

a plurality of bracket members (140) fixed to the tensioning ring member (21), each bracket member (140) including a portion (154) providing a generally upwardly facing seat (178) and a generally vertically extending, radially outwardly opening slot (174),

a plurality of tensioning rods (100), each rod (100) including an upper portion (158) providing means (168) for enabling a user to rotate the rod (100), and means (162) providing a surface for engaging the seat (178) of a respective bracket (140), and a threaded lower portion (104),

a master tensioning member (55) including a central portion (95) defining an aperture (84) and means (97) extending radially outwardly from the central portion (95), the radially outwardly extending portion (97) including an upper surface, a lower surface, a radially outer edge (112), and at least one aperture (108) extending therethrough near the radially outer edge (112) through which the threaded lower portion (104) of a respective tensioning rod (100) passes, and a depression formed in the lower surface adjacent the radially outer edge aperture (108),

means (120) having a threaded aperture (116) for receiving the threaded lower portion (104) of the tensioning rod (100), the fastening means (120) being nestable in the underside depression of the radially ourwardly extending portion (97) for pre-

venting rotation of the fastening means (120) during rotation of the tensioning rod (100),

a piston means (77) slidably received in the interior of the tubular guide member (67) for vertical movement therein, the piston means (77) including an upper portion (81) having coupling means (82) extending through the central aperture (84) of the master tensioning member (55) for coupling the piston means (77) to the master tensioning member (55) for translating vertical movement of the piston (77) into vertical movement of the master tensioning member (55), and a lower portion having teeth (78),

a tension-adjusting means (182) for moving the master tensioning member (55) for adjusting the tension of the drumhead (19) comprising

a frame (186),

a lever system (190) supported by the frame (186), the lever system (190) including

a piston-engaging lever (75) having teeth (79) for engaging the piston teeth (78) for vertically moving the piston means (77),

a transmission arm (294),

a bracket (300) coupled to the transmission arm (294) and lever arm (75) for translating vertical movement of the transmission arm (294) into vertical movement of the lever arm (75),

a shaft member (239) rotatably supported by the frame (186),

a first crank arm (252) fixed to the shaft (239) and a second crank arm (276) coupled to the transmission arm (294) for translating rotary movement of the shaft (239) into vertical movement of the transmission arm (294),

a shaft actuating lever (226) having a first end (235) fixedly journaled to the shaft (239) for rotating the shaft (239), and a second end (228), and

a roller means (232) rotatably mounted adjacent the second end (228) of the shaft actuating lever (226),

a foot-operable lever-actuating means (196) for enabling a user to activate the lever system (190) by foot movement, the foot-operable lever-actuating means (196) including

a pedal shaft means (366) rotatably coupled to the base (62),

a pedal (336) pivotally movable through an arc about the axis of the pedal shaft (366), the pedal (336) having a heel portion (382) fixed to the pedal shaft (366), a forefoot portion (390) swivelably mounted to the heel portion (382), a tooth member (440) fixed to the forefoot portion (390), and means (398) for enabling a user to swivel the forefoot portion (390) relative to the heel portion (382),

a guide means (402) fixed to the heel portion (382), and the roller means (232) of the shaft actuating lever (226) engaging the guide means (402) for providing a movable fulcrum for the pedal means (336) as the pedal means (336) pivots on the pedal shaft means (366) axis,

a positioning means (340) fixed to the base (62) for selectively positioning the pedal means (336), the positioning means (340) including a plurality of teeth (434) arcuately disposed for selective engagement by the tooth (440) of the forefoot portion (390) for selectively positioning the pedal means (336), and an adjustment rod (476) having a threaded lower portion (478) receivable by a threaded aperture fixed to the base (62), a lower end (482) engageable with a surface provided by the transmission arm (294) for moving the transmission arm (294) vertically, and an upper portion grippable for enabling a user to adjust the vertical position of the transmission arm (294) by adjusting the adjustment rod (476) in the threaded aperture fixed to the base (62).

10. A percussion instrument comprising

a body member,

a percussion head carried by the body member,

a tensioning member operatively coupled to the percussion head for exerting tension on the percussion head,

a piston operatively coupled to the tensioning member for moving the tensioning member to alter the tension on the head, the piston including a sidewall and means defining on the sidewall of the piston a plurality of teeth,

means for moving the piston, the piston-moving means including

a movable first lever including a plurality of teeth for engaging the teeth on the sidewall of the piston, movement of the first lever with the lever teeth in engagement with the teeth on the sidewall of the piston moving the piston,

a second movable lever operatively coupled to the first lever for moving the first lever in response to movement of the second lever,

a frame,

a shaft rotatably supported by the frame,

a first crank arm fixed to the shaft for rotation therewith,

a second crank arm,

means for operatively coupling the first crank arm to the second crank arm and second lever, the first and second crank arms cooperable for translating rotation of the shaft into generally linear movement of the second lever, and

means for rotating the shaft.

11. The invention of claim 10 wherein the means for rotating the shaft comprises a third movable lever.

12. The invention of claim 10 wherein the means for operatively coupling the second crank arm to the first crank arm and second lever comprises a third crank arm, means for pivotally connecting the first crank arm to the third crank arm, a guide lever arm, and means for pivotally coupling the third crank arm and guide lever arm to the second crank arm.

13. The invention of claim 12 further comprising a base for supporting the body member and means for pivotally coupling the guide lever arm to the base.

14. The invention of claim 10 further comprising a base for supporting said body member and means for pivotally coupling the first lever to the base.

15. A percussion instrument comrising

a body member,

a percussion head carried by the body member,

a variable tension-exerting means for exerting variable tension on the head to vary the pitch of sound produced when the head is struck, the variable tension exerting means including a crank arm having a roller rotatably mounted on an end of the crank arm, and

an actuating means for actuating the variable tension-exerting means, the actuating means comprising

a pedal including a pivot axis and a long axis generally perpendicular to the pivot axis and a guide means including a member fixed to the pedal gener-

ally parallel to the pedal's long axis and providing a slot, the axis of the roller extending through the slot so that the roller follows the guide means through the arc of the pedal to vary the tension on the head.

16. The invention of claim **15** further comprising a visual indicating means operatively coupled to the pedal for indicating the position of the pedal, the visual indicating means including a pointer movable along a surface markable by a user to enable the user to mark a point on the markable surface corresponding to a position of the pointer corresponding to a selected pitch of the head, to enable the user to reproduce said selected pitch from the position of the pointer.

17. A percussion instrument comprising

a body member,

a percussion head carried by the body member,

a variable tension-exerting means for exerting variable tension on the head to vary pitch of sound produced when the head is struck,

an actuating means for actuating the variable tension-exerting means, the actuating means comprising

a user-actuable movable member having a first portion with a generally planar user-engageable surface and a second portion with a generally planar user engageable surface, a swivel means for swivelably connecting the second portion to the first portion in such a manner that the generally planar user engageable surfaces of the first and second portions are generally co-planar with each other, the swivel means permitting the second portion to swivel about an axis generally perpendicular to the planar user-engageable surfaces, and

an engaging means mounted to the second portion of the user-actuable movable member and

a positioning means selectively engageable with the engaging means for fixing the position of the user-actuable movable member.

18. The invention of claim **17** wherein the engaging means comprises a first tooth and the positioning means comprises an arcuate row of teeth selectively engageable by the first tooth.

19. The invention of claim **18** wherein the user-actuable movable member is pivotally movable through an arc, and includes a long axis generally perpendicular to the axis of the swivel means,

the engaging means is mounted to the second portion of the user-actuable movable member generally parallel with the long axis of the user-actuable movable member, and

the positioning means comprises an arcuate row of teeth extending gernerally parallel to the arc described by the engaging means during the pivotal movement of the user-actuable movable member,

the engaging means being swivelable into and out of engagement with the positioning means through the movement of said second portion of the user-actuable movable member about the swivel means.

20. The invention of claim **17** wherein the user-actuable movable member comprising a foot-actuable pedal, the first portion comprising a heel plate, the second portion comprising a forefoot plate, the swivel means pivotally coupling the forefoot plate to the heel plate, the heel plate and forefoot plate including closely spaced first and second surfaces, one of the first and second surfaces including means defining a plurality of detents and the other of the first and second surfaces including means for engaging the detents and means for urging the engaging means outward to engage the detents, the engaging means being selectively engageable with one of the detents depending upon the relative positions of the forefoot and heel plate.

* * * * *